

SUMMIT INSERT

INSERT FOR LARGE SPACES


Heat Output Cord Wood

99,000 BTU

38,500 BTU EPA Test Fuel

EFFICIENCY (LHV)	80.4%
EMISSIONS	3.9 GM/HR.
LOG SIZE (MAX)	18-20 IN.
FIREBOX SIZE	3.0 CU.FT.
GLASS SIZE	151 SQ.IN.
WEIGHT	465 LBS.

For heating large spaces with an existing masonry fireplace, the Summit Insert is the solution. The first insert with patented Extended Burn Technology, the Summit provides ten full hours of controlled burning for a full night of wood-heated comfort. An efficient, clean-burning heat source, the Summit insert is easy to light, easy to use, and offers a large window that provides a clear view of the flame. With a variable speed fans, clean-glass airwash technology and heavy-gauge overbuilt construction, the Summit will provide many years of comfort and enjoyment.

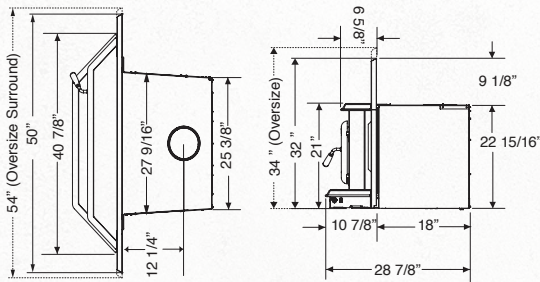

STANDARD FEATURES

- EPA Certified
- Reliable, durable non-catalytic technology
- Single-Lever Air Control
- Air wash system for super clean ceramic glass
- High-tech multi-port combustion air injection system
- Inside and outside combustion air capable
- Floating firebox for extended stove life
- Easy and safe front to back fuel loading
- Rich Metallic black finish
- Cast iron warming shelf & ash lip
- 304 Stainless Steel Baffle, insulation cover, rails and flame shield
- Boost air for easy lighting
- Two 80 cfm temperature-actuated variable-speed blowers
- Extended Burn Technology (EBT2)

DESIGN OPTIONS

- Arched door: choice of three finishes
- Embossed Surround, Standard Size (50" x 32")
- Embossed Surround, Oversize (54" x 34")



For reference only. Installations should be based on installation manuals. Specifications subject to change.