



## FIREPLACE FOR MEDIUM SPACES

Heat Output Cord Wood

### 85,000 BTU

33,000 BTU EPA Test Fuel

EFFICIENCY (LHV)	72.6%
EMISSIONS	3.47 GM/HR.
LOG SIZE (MAX)	18 INCHES
FIREBOX SIZE	2.5 CU.FT.
GLASS SIZE	184 SQ.IN.
WEIGHT	608 LB.

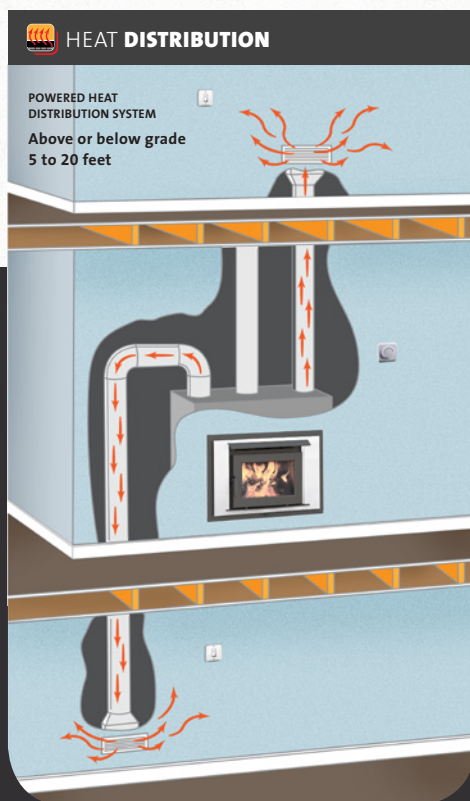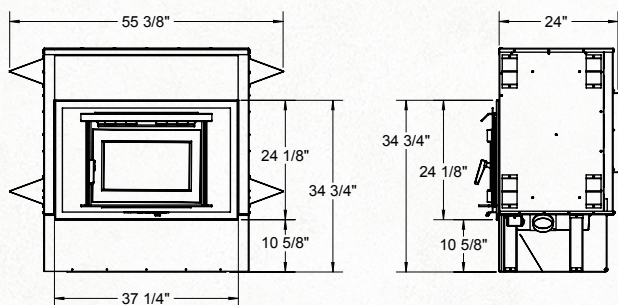

Heat medium spaces with the reduced footprint of a wall-mount fireplace. The FP25 offers exceptional wood heat performance with a large contemporary cast iron door and viewing area. Crafted with a floating firebox of heavy gauge steel, a high capacity baffle system, and EBT2 extended burn technology, this full-featured zero clearance fireplace is easy to load, easy to light, and will offer years of reliable heat for your home.

Homeowners can supplement their heat source with an optional Heat Distribution System with the FP25. Each heat duct is independently switch controlled, transferring heat into isolated rooms, and allowing for on demand control and comfort.



### STANDARD FEATURES

- EPA Certified
- Reliable, durable non-catalytic technology
- Air wash system for super clean ceramic glass
- Boost air for easy lighting
- Oversize glass viewing window
- Floating firebox for extended stove life
- 304 Stainless Steel Baffle, insulation cover, rails and flame shield
- High-tech multi-port combustion air injection system
- Extended Burn Technology (EBT2)
- East-West loading
- Two 80 cfm temperature actuated blowers
- Single-Lever Air Control
- Cast iron door
- Mobile Home Approved
- Requires 6" chimney

### PERFORMANCE OPTIONS

EPA Certified Powered Heat Distribution System

