


Designed to ignite

your passion.

IgniteXL[®] 50" Linear Electric Fireplace

XLF50

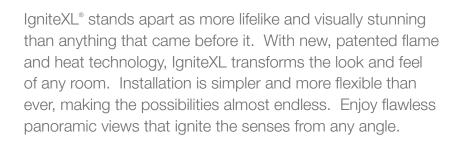




Complex®



IgniteXL® 50" Linear Electric Fireplace

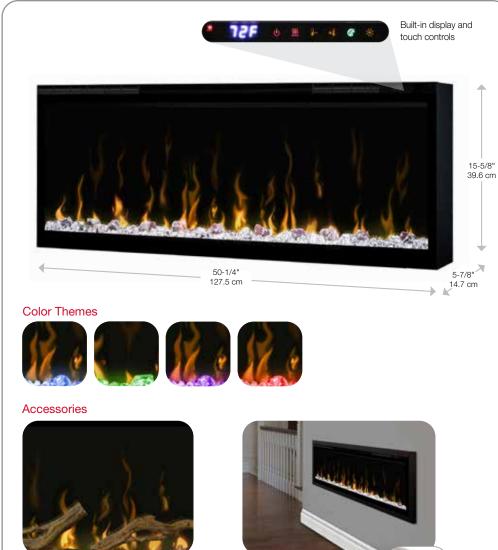

50" Driftwood and River Rock Accessory Package (LF50DWS-KIT)

50" IgniteXL Trim Kit (XLFTRIM50) Allows installation of IgniteXL in 2"x4" wall construction. 52-3/4" x 18-1/4" x 1-7/8" (134.0 cm x 46.2 cm x 4.5 cm)



120 Volts	1,500 Watts	5,118 BTU
240 Volts	2,500 Watts	8,530 BTU

Model #	Description	Lbs / Kg	UPC	Wty†	Carton Dimensions (WxHxD) Cu		Cube	Cube	
					Inches	cm	ft ³	m ³	
XLF50	50" IgniteXL Linear Electric Fireplace	73.4 / 33.3	781052 098725	5 yr.	56-3/8 x 21-1/4 x 12	143.2 x 54.0 x 30.5	8.3	0.2	
LF50DWS-KIT	50" Driftwood and River Rock Accessory Package	7.0/3.17	781052 102842		34-1/4 x 5-7/8 x 8-1/8	87.2 x 14.98 x 20.57	0.94	0.02	
XLFTRIM50	50" IgniteXL Linear Electric Fireplace Trim Kit	7.7 / 3.5	781052 107953	1 yr.	56-3/4 x 3-3/4 x 6-7/8	144.0 x 9.3 x 17.5	0.83	0.02	

Specifications, finishes and dimensions are subject to change. †Limited warranty. ©2020 Glen Dimplex Americas

Fe	atures
*	Multi-Fire XD [®] Flame Effect Vivid flames that are brighter and more lifelike day or night.
	Less Frame, More Flame Clean front face with minimal trim makes the dazzling flames the focal point.
l	Comfort\$aver® Heating System Safe ceramic heat, plus 11% energy savings, warms up to 1,000 sq. ft.
Ø	Media Accent Colors Choose from a variety of brilliant color themes or cycle through a range of colors using the custom mode, freezing on the hue of your choice.
↔	Edgeless Design Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.
I ≣	Precision Thermostat Electronic thermostat maintains room temperature within 1/2°C (1°F) for perfect comfort and increased energy efficiency.
\$	Built-in Touch Controls Settings and temperature display are hidden when not in use.
<u>yr</u>	Heat Boost Quickly warms a room by delivering maximum heat output for a pre-determined amount of time.
0	Mood-maker Remote Customize the light color and intensity for a fireplace that reflects your personality.
*	Seamless Installation Low-profile design fully recesses in 2" x 6" wall construction and 2" x 4" with optional trim. Hardwire using 120V or 240V for powerful heating.
-	Hardwire or Plug-in Includes 120V plug-in cord kit or hardwire to 120V / 240V power supply.
0	Cool-touch Glass Glass remains cool making it safe for children and pets in any location.





IgniteXL® 50" Linear Electric Fireplace

XLF50

Product Dimensions:

