
Framing Information: 98HH Three Sided (TS) (Double Glass)



Framing Dimensions

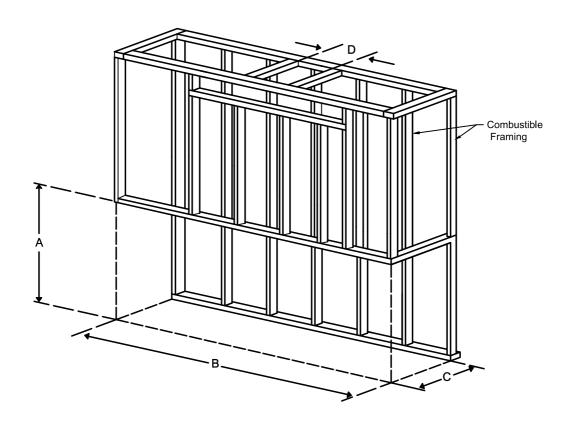

Model	А	В	С	D
98HH TS	49 ½"	102 ½"	21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Page 1 of 3

Framing Information: 98HH Three Sided (TS) (Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Releas 5/8" Type X Drywa**ll** on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing Air Intake (required for double glass only) Elevation View Section View Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Page 2 of 3

Framing Information: 98HH Three Sided (TS) (Double Glass)

Fireplace Dimensions

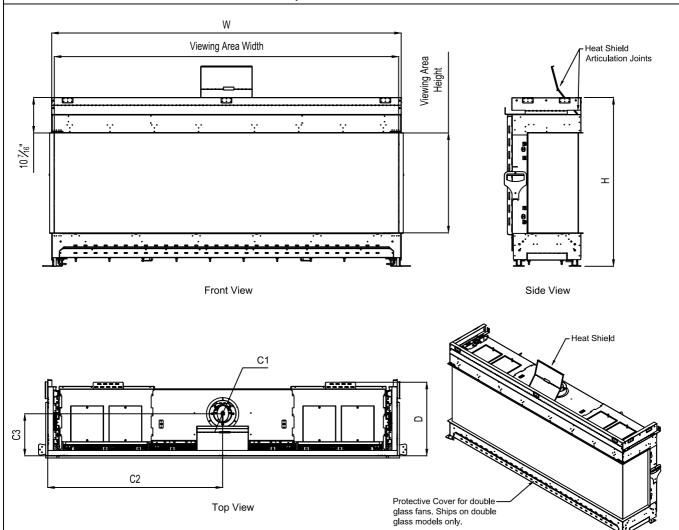

Model			C3	Viewin	ewing Area			
Wodel	Height	Width	Depth			C3	Front	Side
98HH TS	49 ½"	102 ½"	21 %"	7 %"	51 1/4"	12 ½6"	101 ¾ ₆ " W X 29 ½" H	14 ¹³ / ₁₆ " W X 29 ½" H

Note: 1. Drawings are not to Scale

2. All dimensions in inches